



CRUSHER BUCKET


BF60.1 S4



A

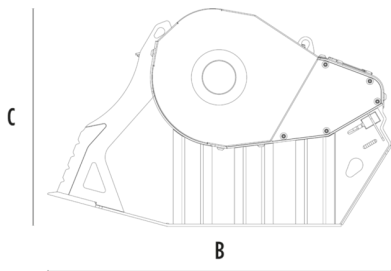

B

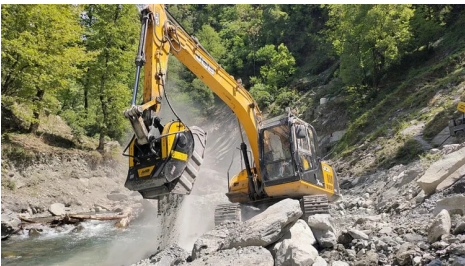

SPECIFICATIONS



Recommended excavator	ton	10 - 18
Weight	ton	1,65
Load capacity	m³	0,55
Pressure	bar	220 - 280
Back pressure	bar	< 10
Oil flow rate*	l/min	120 - 150
Crusher mouth width	mm	610
Crusher mouth height	mm	500
Size A	mm	1000
Size B	mm	1745
Size C	mm	1100

* The minimum hydraulic flow rate value must be alongside the required operating pressure.

OPTIONAL ACCESSORIES

Dust suppression kit	Hour meter
24 V Iron Separator	24 Month Warranty

APPLICATION AREAS



Demolitions and Renovations



Road works and Infrastructures



Quarries and Mines



Enclosed Spaces



Urban Construction Sites



Remote Areas and Complex Logistics



Pipelines



Inert materials recycling and Waste management



Foundries



Agriculture and Landscaping



Forest maintenance