



SORTING GRAPPLE

MB-G1500 S4

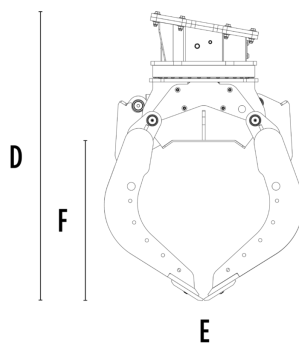

SPECIFICATIONS

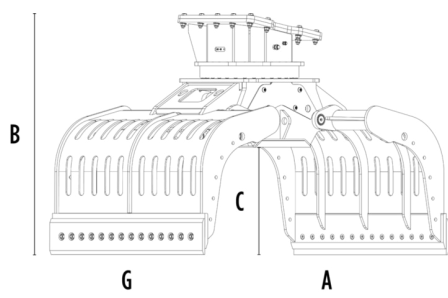

Recommended excavator	ton	20 - 30
Weight	ton	2,05
Capacity (claws closed)	m³	0,00
Rotation	Degree	360°
Oil pressure (rotation)	bar	200 - 250
Oil flow rate (rotation)	l/min	30 - 40
Oil pressure (opening - closing)	bar	300 - 350
Oil flow rate (opening - closing)	l/min	70 - 90
Size A	mm	2480
Size B	mm	1650
Size C	mm	810
Size D	mm	1950
Size E	mm	1365
Size F	mm	1110
Size G	mm	1535

OPTIONAL ACCESSORIES

Multi-purpose blade kit	Clam shell kit
Grip improvement kit	Rubber protection kit
Rotation power extender kit	12 V Electrical Kit (for 2 hose functionality)
Remote power control system	24 Month Warranty

APPLICATION AREAS



Demolitions and Renovations



Road works and Infrastructures



Quarries and Mines



Urban Construction Sites



Remote Areas and Complex Logistics



Pipelines



Inert materials
recycling and Waste
management



Agriculture and
Landscaping



Forest maintenance