
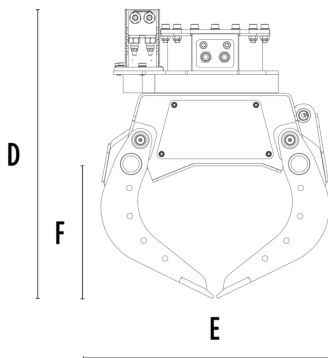


SORTING GRAPPLE

MB-G350 S4

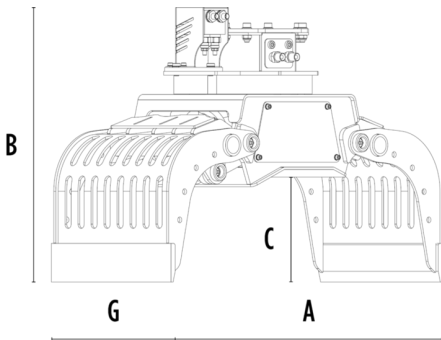

 SPECIFICATIONS

Recommended excavator	ton	1,3 - 2,6
Weight	ton	0,085
Capacity (claws closed)	m³	0,00
Rotation	Degree	360°
Oil pressure (rotation)	bar	130 - 170
Oil flow rate (rotation)	l/min	5 - 10
Oil pressure (opening - closing)	bar	180 - 220
Oil flow rate (opening - closing)	l/min	15 - 20
Size A	mm	795
Size B	mm	570
Size C	mm	233
Size D	mm	615
Size E	mm	490
Size F	mm	283
Size G	mm	350

OPTIONAL ACCESSORIES

Clam shell kit	Serrated side plate kit
Serrated side profile kit	12 V Electrical Kit (for 2 hose functionality)
24 Month Warranty	

APPLICATION AREAS



Demolitions and Renovations



Road works and Infrastructures



Enclosed Spaces



Urban Construction Sites



Pipelines



Inert materials recycling and Waste management



Agriculture and Landscaping



Forest maintenance