



SORTING GRAPPLE

MB-G400 S4

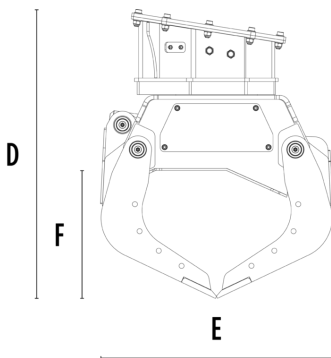

SPECIFICATIONS

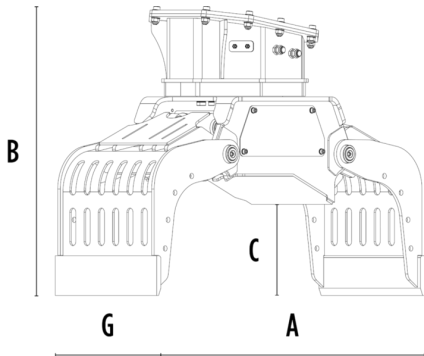

Recommended excavator	ton	2,4 - 4
Weight	ton	0,20
Capacity (claws closed)	m³	0,00
Rotation	Degree	360°
Oil pressure (rotation)	bar	130 - 170
Oil flow rate (rotation)	l/min	8 - 12
Oil pressure (opening - closing)	bar	180 - 220
Oil flow rate (opening - closing)	l/min	20 - 25
Size A	mm	1050
Size B	mm	780
Size C	mm	330
Size D	mm	825
Size E	mm	675
Size F	mm	375
Size G	mm	400

OPTIONAL ACCESSORIES

Clam shell kit	Serrated side plate kit
Serrated side profile kit	12 V Electrical Kit (for 2 hose functionality)
24 Month Warranty	

APPLICATION AREAS



Demolitions and Renovations



Road works and Infrastructures



Enclosed Spaces



Urban Construction Sites



Pipelines



Inert materials recycling and Waste management



Agriculture and Landscaping



Forest maintenance