


SORTING GRAPPLE

MB-G500 S4



SPECIFICATIONS

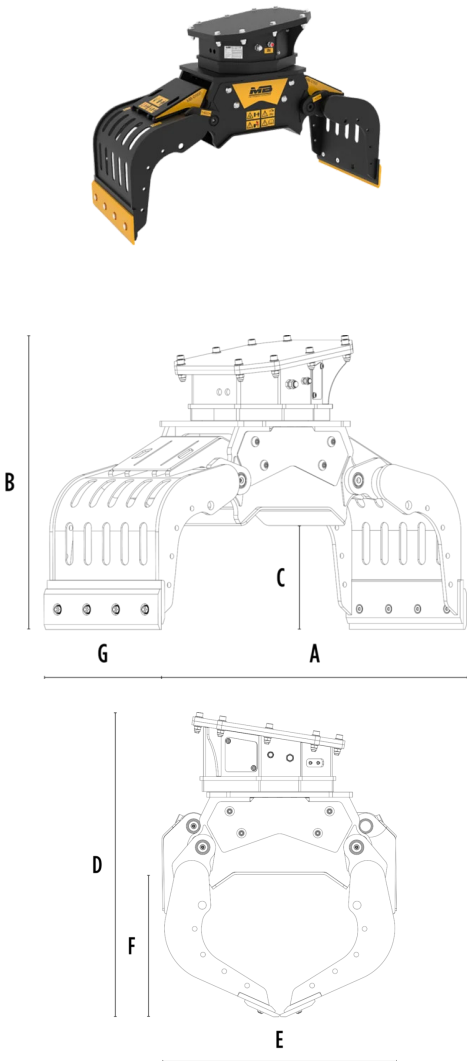

Recommended excavator	ton	5 - 8
Weight	ton	0,42
Capacity (claws closed)	m³	0,18
Rotation	Degree	360°
Oil pressure (rotation)	bar	160 - 200
Oil flow rate (rotation)	l/min	15 - 25
Oil pressure (opening - closing)	bar	180 - 250
Oil flow rate (opening - closing)	l/min	30 - 40
Size A	mm	1500
Size B	mm	980
Size C	mm	415
Size D	mm	1095
Size E	mm	855
Size F	mm	530
Size G	mm	555

OPTIONAL ACCESSORIES

Multi-purpose blade kit	Clam shell kit
Serrated side plate kit	Grip improvement kit
Rubber protection kit	Serrated side profile kit
12 V Electrical Kit (for 2 hose functionality)	24 Month Warranty

APPLICATION AREAS



Demolitions and Renovations



Road works and Infrastructures



Enclosed Spaces



Urban Construction Sites



Pipelines



Inert materials recycling and Waste management



Agriculture and Landscaping



Forest maintenance