



SHAFTS SCREENER

MB-HDS207

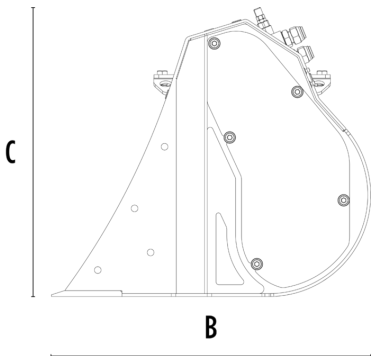


SPECIFICATIONS

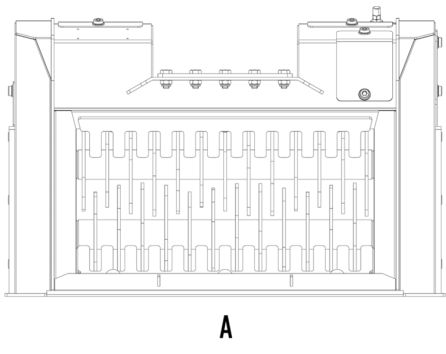

Recommended excavator	ton	1,3 - 2,8
Recommended backhoe loader	ton	3 - 4*
Weight	ton	0,098
Load capacity	m³	0,05
Pressure	bar	200 - 220
Back pressure	bar	< 20
Oil flow rate**	l/min	25 - 35
Size A	mm	740
Size B	mm	545
Size C	mm	495

* Only compatible with the posterior boom of a Backhoe.
** The minimum hydraulic flow rate value must be alongside the required operating pressure.

SHAFT KIT

KIT	ADJUSTMENT*	APPLICATION
 RQ8 Sifting kit	8 mm	Soil Aeration
 RQ15 Sifting kit	15 mm	Sifting and sorting damp/dry materials
 RM Mixer kit		Coal reduction Soil Aeration Compost Aeration Glass reduction Drywall reduction

* Shafts in closed position.

OPTIONAL ACCESSORIES

Load capacity increase kit	Shaft holder
24 Month Warranty	RQ8 Sifting kit
RQ15 Sifting kit	RM Mixer kit

APPLICATION AREAS



Enclosed Spaces



Urban Construction Sites



Remote Areas and Complex Logistics



Pipelines



Earthmoving and Excavations



Environmental Remediation



Agriculture and Landscaping



Forest maintenance