



SHAFTS SCREENER
MB-HDS307



A

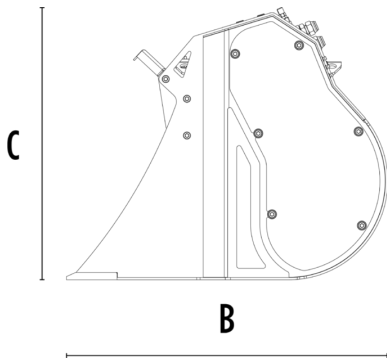

B

SPECIFICATIONS




Recommended excavator	ton	2,5 - 5
Recommended backhoe loader	ton	4 - 6*
Weight	ton	0,17
Load capacity	m³	0,08
Pressure	bar	200 - 220
Back pressure	bar	< 20
Oil flow rate**	l/min	25 - 35
Size A	mm	760
Size B	mm	700
Size C	mm	595



* Only compatible with the posterior boom of a Backhoe.
** The minimum hydraulic flow rate value must be alongside the required operating pressure.

SHAFT KIT

KIT	ADJUSTMENT*	APPLICATION
 RQ8 Sifting kit	8 mm	Soil Aeration
RQ15 Sifting kit	15 mm	Sifting and sorting damp/dry materials
 RM Mixer kit		Coal reduction Soil Aeration Compost Aeration Glass reduction Drywall reduction

* Shafts in closed position.

OPTIONAL ACCESSORIES

Shaft holder	24 Month Warranty
RQ8 Sifting kit	RQ15 Sifting kit
RM Mixer kit	

APPLICATION AREAS

