
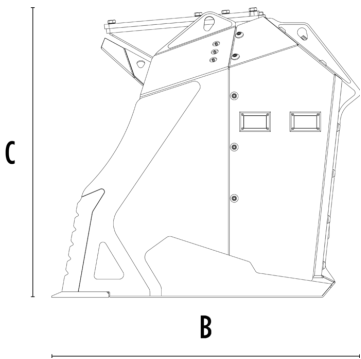


SHAFTS SCREENER
MB-HDS314

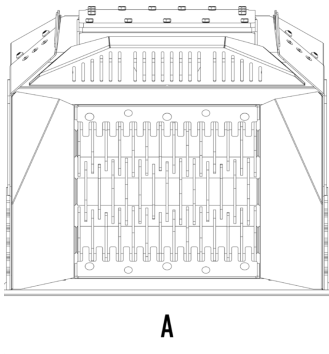


SPECIFICATIONS

	Recommended excavator	ton	13 - 20
	Recommended loader*	ton	9 - 14
	Weight	ton	1,40
	Load capacity	m³	0,90
	Pressure	bar	230 - 280
	Back pressure	bar	< 20
	Oil flow rate**	l/min	100 - 160
	Size A	mm	1430
	Size B	mm	1350
	Size C	mm	1250

* Please verify machine's Rated Operating Capacity.
** The minimum hydraulic flow rate value must be alongside the required operating pressure.

SHAFT KIT

KIT	ADJUSTMENT*	APPLICATION
 Q8 Sifting kit	8 mm	Soil Aeration Sifting and sorting damp/dry materials
 Q20 Sifting kit	20 mm	
 Q50 Sifting kit	50 mm	
 RM Mixer kit		Coal reduction Soil Aeration Compost Aeration Glass reduction Drywall reduction
 RE8 Fine sifting kit	8.5 mm	Sifting damp/dry soil
 RE16 Fine sifting kit	16 mm	
 RC Compost kit	36.5 mm	Shredding foliage and small branches Composting

* Shafts in closed position.

OPTIONAL ACCESSORIES

Shaft holder	24 Month Warranty
Q8 Sifting kit	Q20 Sifting kit
Q50 Sifting kit	RM Mixer kit
RC Compost kit	RE8 Fine sifting kit
RE16 Fine sifting kit	

APPLICATION AREAS


Demolitions and Renovations


Road works and Infrastructures


Enclosed Spaces


Urban Construction Sites


Remote Areas and Complex Logistics


Pipelines


Inert materials recycling and Waste management


Earthmoving and Excavations


Environmental Remediation


Agriculture and Landscaping


Forest maintenance