



SHAFTS SCREENER
MB-HDS323

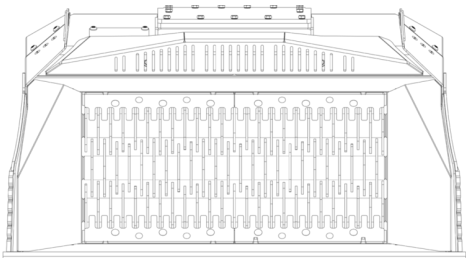

A

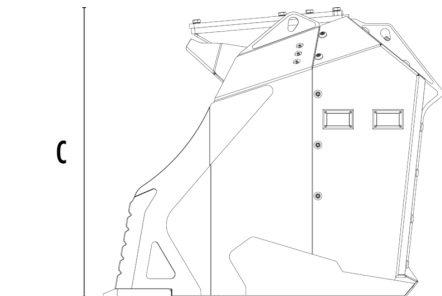

B



SPECIFICATIONS



Recommended excavator	ton	22 - 35
Recommended loader*	ton	12 - 16
Weight	ton	2,40
Load capacity	m³	1,65
Load capacity with coal capacity increase kit	m³	2,00 - 2,40
Pressure	bar	250 - 300
Back pressure	bar	< 20
Oil flow rate**	l/min	120 - 160
Size A	mm	2330
Size B	mm	1500
Size C	mm	1250



* Please verify machine's Rated Operating Capacity.
** The minimum hydraulic flow rate value must be alongside the required operating pressure.

SHAFT KIT

KIT	ADJUSTMENT*	APPLICATION
RQ8 Sifting kit RQ20 Sifting kit RQ50 Sifting kit	8 mm 20 mm 50 mm	Soil Aeration Sifting and sorting damp/dry materials
RM Mixer kit		Coal reduction Soil Aeration Compost Aeration Glass reduction Drywall reduction
RE8 Fine sifting kit RE16 Fine sifting kit	8.5 mm 16 mm	Sifting damp/dry soil
RC Compost kit	36.5 mm	Shredding foliage and small branches Composting

* Shafts in closed position.

OPTIONAL ACCESSORIES

Shaft holder	24 Month Warranty
RQ8 Sifting kit	RQ20 Sifting kit
RQ50 Sifting kit	RM Mixer kit
RC Compost kit	RE8 Fine sifting kit
RE16 Fine sifting kit	

APPLICATION AREAS


Demolitions and Renovations


Road works and Infrastructures


Quarries and Mines


Urban Construction Sites


Remote Areas and Complex Logistics


Pipelines


Inert materials recycling and Waste management


Earthmoving and Excavations


Environmental Remediation