



SHAFTS SCREENER
MB-HDS412



A

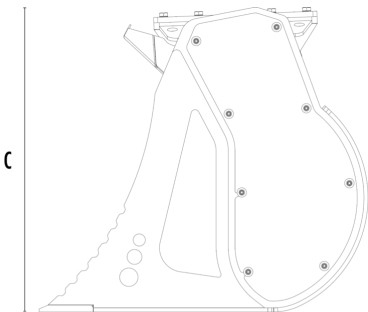

B




SPECIFICATIONS



Recommended excavator	ton	10 - 14
Weight	ton	1,20
Load capacity	m³	0,55
Pressure	bar	230 - 280
Back pressure	bar	< 20
Oil flow rate*	l/min	90 - 150
Size A	mm	1250
Size B	mm	1220
Size C	mm	1110

* The minimum hydraulic flow rate value must be alongside the required operating pressure.

SHAFT KIT

KIT	ADJUSTMENT*	APPLICATION
 RQ8 Sifting kit	8 mm	Soil Aeration Sifting and sorting damp/dry materials
 RQ20 Sifting kit	20 mm	
 RQ50 Sifting kit	50 mm	
 RM Mixer kit		Coal reduction Soil Aeration Compost Aeration Glass reduction Drywall reduction
 RE8 Fine sifting kit	8.5 mm	Sifting damp/dry soil
 RE16 Fine sifting kit	16 mm	
 RC Compost kit	36.5 mm	Shredding foliage and small branches Composting

* Shafts in closed position.

OPTIONAL ACCESSORIES

Shaft holder	24 Month Warranty
RQ8 Sifting kit	RQ20 Sifting kit
RQ50 Sifting kit	RM Mixer kit
RC Compost kit	RE8 Fine sifting kit
RE16 Fine sifting kit	

APPLICATION AREAS


Demolitions and Renovations


Road works and Infrastructures


Enclosed Spaces


Urban Construction Sites


Remote Areas and Complex Logistics


Pipelines


Inert materials recycling and Waste management


Earthmoving and Excavations


Environmental Remediation


Agriculture and Landscaping


Forest maintenance