




SHAFTS SCREENER
MB-HDS533

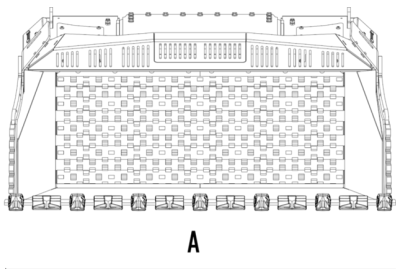

SPECIFICATIONS

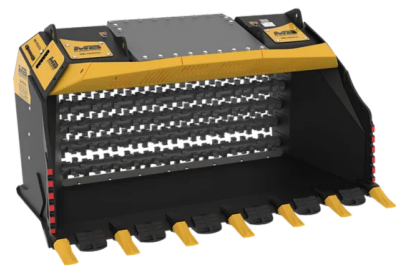

Recommended excavator	ton	50 - 80
Recommended loader*	ton	30 - 50
Weight	ton	6,60
Load capacity	m³	3,80 - 5,20
Pressure	bar	250 - 300
Back pressure	bar	< 20
Oil flow rate**	l/min	230 - 250
Size A	mm	3400
Size B	mm	2130
Size C	mm	1770



* Please verify machine's Rated Operating Capacity.
** The minimum hydraulic flow rate value must be alongside the required operating pressure.

SHAFT KIT



KIT	ADJUSTMENT*	APPLICATION
RM Mixer kit		Coal reduction Soil Aeration Compost Aeration Glass reduction Drywall reduction



RQ45 Sifting kit	45 mm	Soil Aeration Sifting and sorting damp/dry materials
------------------	-------	---

* Shafts in closed position.

OPTIONAL ACCESSORIES

RM Mixer kit	RQ45 Sifting kit
--------------	------------------

APPLICATION AREAS



Road works and Infrastructures



Quarries and Mines



Remote Areas and Complex Logistics



Pipelines



Inert materials recycling and Waste management



Earthmoving and Excavations



Environmental Remediation