

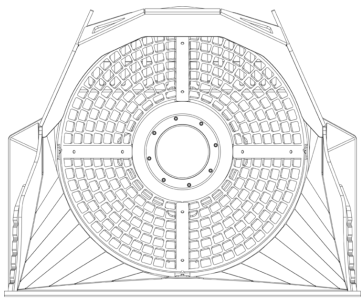


SCREENING BUCKET

MB-LS170 S2



A

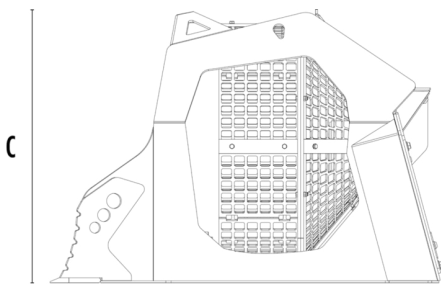

B



SPECIFICATIONS



Recommended backhoe loader	ton	8 - 15
Recommended loader*	ton	8 - 15
Weight	ton	1,45
Load capacity	m³	1,10
Pressure	bar	160 - 200
Back pressure	bar	< 20
Oil flow rate**	l/min	80 - 100
Basket diameter	mm	1200
Basket depth	mm	900
Size A	mm	1670
Size B	mm	1930
Size C	mm	1360

* Please verify machine's Rated Operating Capacity.
** The minimum hydraulic flow rate value must be alongside the required operating pressure.

OPTIONAL ACCESSORIES

Hour meter	24 Month Warranty
------------	-------------------

APPLICATION AREAS



Road works and Infrastructures



Enclosed Spaces



Urban Construction Sites



Inert materials recycling and Waste management



Earthmoving and Excavations



Environmental Remediation



Foundries



Agriculture and Landscaping