



SCREENING BUCKET
MB-LS220 S2

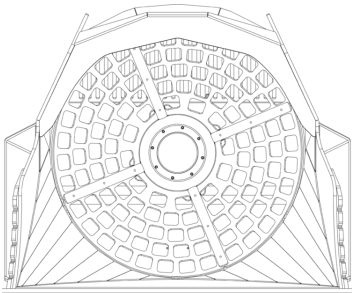

A

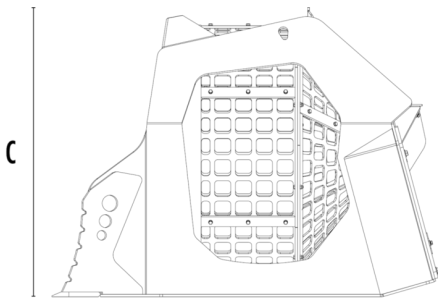

B



SPECIFICATIONS



Recommended loader*	ton	15 - 25
Weight	ton	2,80
Load capacity	m³	2,40
Pressure	bar	200 - 250
Back pressure	bar	< 20
Oil flow rate**	l/min	120 - 140
Basket diameter	mm	1600
Basket depth	mm	1225
Size A	mm	2180
Size B	mm	2355
Size C	mm	1790

* Please verify machine's Rated Operating Capacity.
** The minimum hydraulic flow rate value must be alongside the required operating pressure.

OPTIONAL ACCESSORIES

Hour meter	24 Month Warranty
------------	-------------------

APPLICATION AREAS



Road works and Infrastructures



Enclosed Spaces



Urban Construction Sites



Inert materials recycling and Waste management



Earthmoving and Excavations



Environmental Remediation



Foundries



Agriculture and Landscaping