


DEMOLITION PULVERIZER

MB-PT1650



SPECIFICATIONS

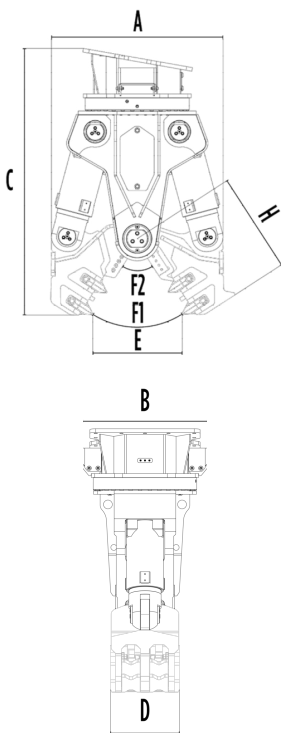

Recommended excavator	ton	19 - 25
Main frame weight	ton	1,20
Speed/Min. (minimum - maximum)	rpm	20 - 25
Rotation	Degree	360°
Oil pressure (rotation)	bar	200 - 250
Oil flow rate (rotation)	l/min	30 - 40
Oil pressure (opening - closing)	bar	300 - 350
Oil flow rate (opening - closing)	l/min	100 - 150

JAW KIT

	 Crusher Kit	 Pulverizer Kit	 Shear Kit
Kit weight	0,43 ton	0,62 ton	0,40 ton
Total weight (with Main frame)	1,63 ton	1,82 ton	1,60 ton
Size A	1340 mm	1160 mm	1160 mm
Size B	850 mm	850 mm	850 mm
Size C	1865 mm	1810 mm	1910 mm
Size D	300 mm	470 mm	245 mm
Size E	710 mm	605 mm	365 mm
Size H	725 mm	680 mm	580 mm
Pick force F1	65 ton	75 ton	90 ton
Blade force F2	190 ton	190 ton	200 ton
Ø Maximum Rebar	40 mm	40 mm	-

OPTIONAL ACCESSORIES

Crusher Kit	Pulverizer Kit
Shear Kit	

APPLICATION AREAS



Demolitions and Renovations



Enclosed Spaces