


DRUM CUTTER
MB-R800



SPECIFICATIONS

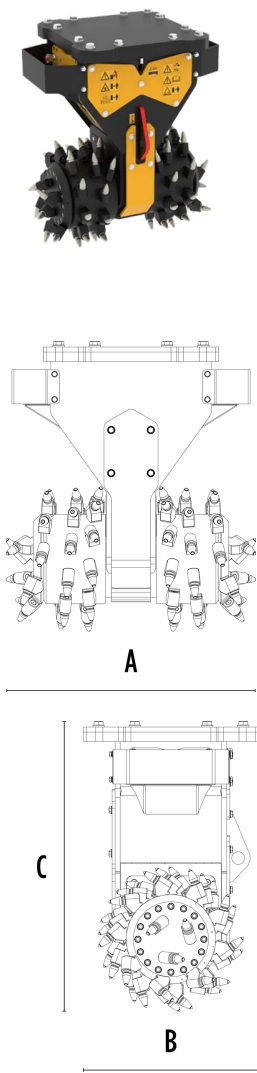

Recommended excavator	ton	10 - 22
Weight	ton	1,00
Pressure*	bar	300 - 350
Back pressure	bar	< 4
Oil flow rate**	l/min	200 - 300
Cutting width	mm	1015
Speed/Min. (minimum - maximum)	rpm	60 - 80
Output torque	kNm	10
Drum diameter	mm	600
Cutting force***	kN	33,9
Size A	mm	1015
Size B	mm	600
Size C	mm	1120

* Output torque and cutting force decrease as the operating pressure decreases.
** The minimum hydraulic flow rate value must be alongside the required operating pressure.
*** Cutting force at tooth tip.

OPTIONAL ACCESSORIES

Dust suppression kit	Interchangeable drum kit (low-set / full-set)
Rock and asphalt picks kit	24 Month Warranty

APPLICATION AREAS

Demolitions and Renovations

Road works and Infrastructures

Quarries and Mines

Enclosed Spaces

Urban Construction Sites

Remote Areas and Complex Logistics

Pipelines

Foundries

Agriculture and Landscaping

Forest maintenance