



SCREENING BUCKET

MB-S10 S4

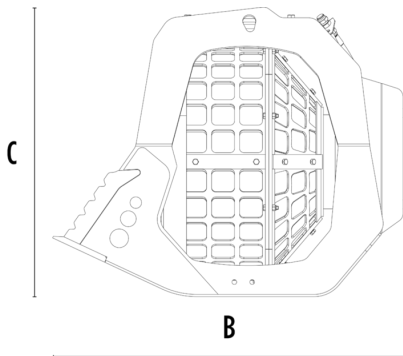

SPECIFICATIONS

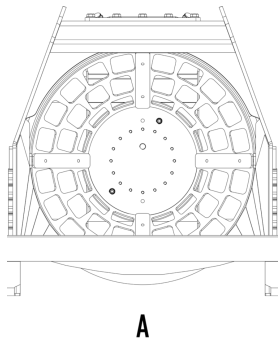

Recommended excavator	ton	6 - 9
Recommended backhoe loader	ton	8 - 9*
Weight	ton	0,41
Load capacity	m³	0,32
Pressure	bar	130 - 150
Back pressure	bar	< 20
Oil flow rate**	l/min	40 - 60
Basket diameter	mm	800
Basket depth	mm	555
Size A	mm	950
Size B	mm	1220
Size C	mm	1010

* Only compatible with the posterior boom of a Backhoe.
** The minimum hydraulic flow rate value must be alongside the required operating pressure.

OPTIONAL ACCESSORIES

Hour meter	Basket protection kit
24 Month Warranty	

APPLICATION AREAS



Enclosed Spaces



Urban Construction Sites



Pipelines



Inert materials recycling and Waste management



Earthmoving and Excavations



Environmental Remediation



Agriculture and Landscaping



Forest maintenance