



SCREENING BUCKET
MB-S14 S4



A

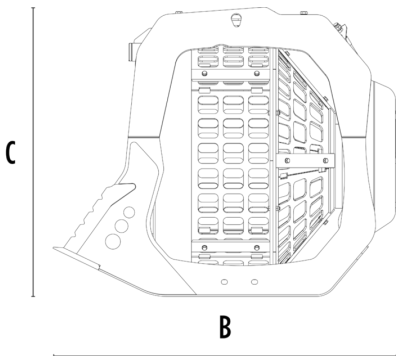

B



SPECIFICATIONS



Recommended excavator	ton	9 - 20
Weight	ton	1,10
Load capacity	m³	1,10
Pressure	bar	150 - 200
Back pressure	bar	< 20
Oil flow rate*	l/min	60 - 80
Basket diameter	mm	1200
Basket depth	mm	900
Size A	mm	1400
Size B	mm	1700
Size C	mm	1440

* The minimum hydraulic flow rate value must be alongside the required operating pressure.

OPTIONAL ACCESSORIES

Dust suppression kit	Hour meter
Basket protection kit	24 Month Warranty

APPLICATION AREAS



Road works and Infrastructures



Quarries and Mines



Enclosed Spaces



Urban Construction Sites



Remote Areas and Complex Logistics



Pipelines



Inert materials recycling and Waste management



Earthmoving and Excavations



Environmental Remediation



Agriculture and Landscaping



Forest maintenance