



SCREENING BUCKET
MB-S18 S4



A

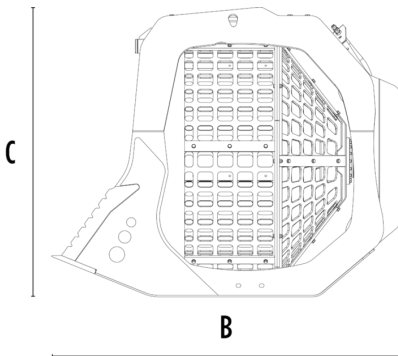

B



SPECIFICATIONS



Recommended excavator	ton	20 - 35
Weight	ton	2,00
Load capacity	m³	2,40
Pressure	bar	200 - 250
Back pressure	bar	< 20
Oil flow rate*	l/min	120 - 140
Basket diameter	mm	1600
Basket depth	mm	1225
Size A	mm	1840
Size B	mm	2260
Size C	mm	1870

* The minimum hydraulic flow rate value must be alongside the required operating pressure.

OPTIONAL ACCESSORIES

Dust suppression kit	Hour meter
Basket protection kit	24 Month Warranty

APPLICATION AREAS



Road works and Infrastructures



Quarries and Mines



Urban Construction Sites



Remote Areas and Complex Logistics



Pipelines



Inert materials recycling and Waste management



Earthmoving and Excavations



Environmental Remediation



Agriculture and Landscaping



Forest maintenance