



SCREENING BUCKET
MB-S23



A

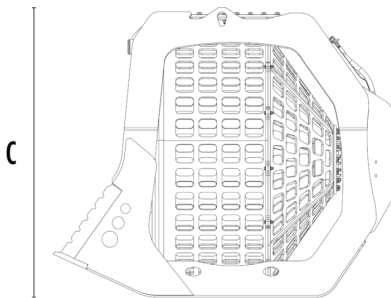

C

B



SPECIFICATIONS



Recommended excavator	ton	35 - 50
Weight	ton	3,66
Load capacity	m³	3,75
Pressure	bar	320 - 350
Back pressure	bar	< 5
Oil flow rate*	l/min	160 - 180
Basket diameter	mm	1970
Basket depth	mm	1490
Size A	mm	2320
Size B	mm	2840
Size C	mm	2350

* The minimum hydraulic flow rate value must be alongside the required operating pressure.

OPTIONAL ACCESSORIES

Dust suppression kit	Hour meter
24 Month Warranty	

APPLICATION AREAS

Road works and Infrastructures

Quarries and Mines

Urban Construction Sites

Remote Areas and Complex Logistics

Pipelines

Inert materials recycling and Waste management

Earthmoving and Excavations

Environmental Remediation

Agriculture and Landscaping

Forest maintenance