



DRUM CUTTER
MB-R700

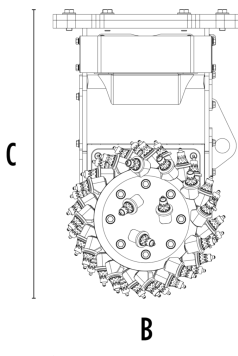

SPECIFICATIONS



Recommended excavator	ton	6 - 13
-----------------------	-----	--------



Recommended skid steer loader*	ton	6 - 10
--------------------------------	-----	--------

Weight	ton	0,60
Pressure**	bar	300 - 350
Back pressure	bar	< 4
Oil flow rate***	l/min	110 - 180
Cutting width	mm	890
Speed/Min. (minimum - maximum)	rpm	80 - 110
Output torque	kNm	5
Drum diameter	mm	500
Cutting force****	kN	19,6
Size A	mm	895
Size B	mm	500
Size C	mm	930

* Please verify machine's Rated Operating Capacity.
** Output torque and cutting force decrease as the operating pressure decreases.
*** The minimum hydraulic flow rate value must be alongside the required operating pressure.
**** Cutting force at tooth tip.

OPTIONAL ACCESSORIES

Dust suppression kit	Interchangeable drum kit (low-set / full-set)
Rock and asphalt picks kit	24 Month Warranty

APPLICATION AREAS

Demolitions and Renovations

Road works and Infrastructures

Quarries and Mines

Enclosed Spaces

Urban Construction Sites

Remote Areas and Complex Logistics

Pipelines

Foundries

Agriculture and Landscaping

Forest maintenance