




SHAFTS SCREENER
MB-HDS220

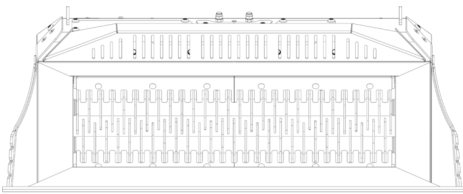

A

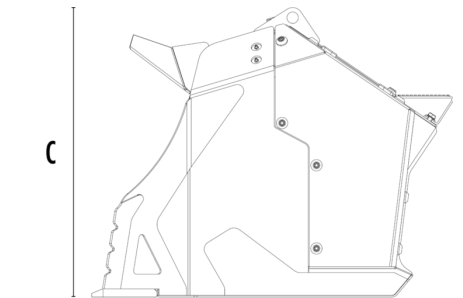

B

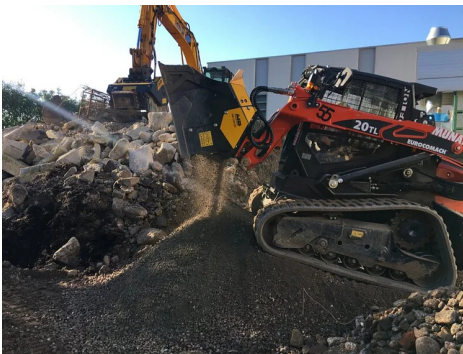

SPECIFICATIONS



Recommended backhoe loader	ton	7 - 11
----------------------------	-----	--------




Recommended skid steer loader*	ton	4,5 - 10
--------------------------------	-----	----------

Weight	ton	1,00
Load capacity	m³	0,60
Pressure	bar	230 - 280
Back pressure	bar	< 20
Oil flow rate**	l/min	90 - 150
Size A	mm	2220
Size B	mm	1060
Size C	mm	890

* Please verify machine's Rated Operating Capacity.
** The minimum hydraulic flow rate value must be alongside the required operating pressure.

SHAFT KIT

KIT	ADJUSTMENT*	APPLICATION
 RQ8 Sifting kit	8 mm	Soil Aeration
 RQ20 Sifting kit	20 mm	Sifting and sorting damp/dry materials
 RM Mixer kit		Coal reduction Soil Aeration Compost Aeration Glass reduction Drywall reduction
 RE8 Fine sifting kit	8.5 mm	Sifting damp/dry soil

* Shafts in closed position.

OPTIONAL ACCESSORIES

Shaft holder	24 Month Warranty
RQ8 Sifting kit	RQ20 Sifting kit
RM Mixer kit	RE8 Fine sifting kit

APPLICATION AREAS

